

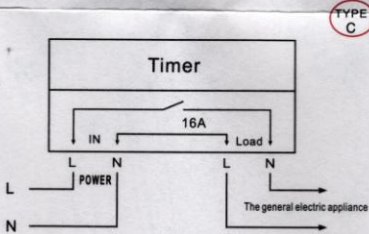



WEEKLY PROGRAMMABLE TIMER

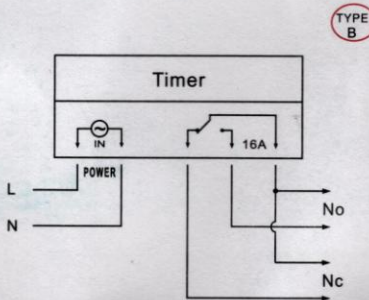

CONNECTION DIAGRAM

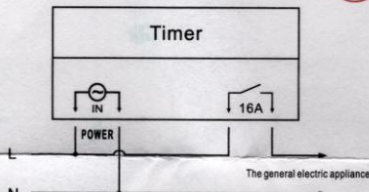

DIMENSIONS

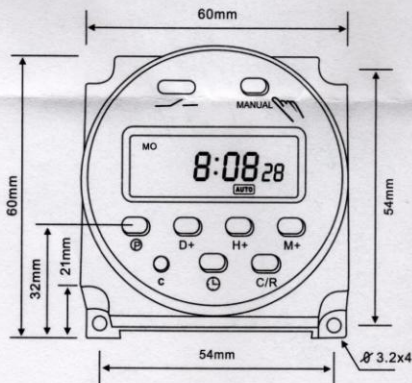


DIN Rail Installation

- Advanced pre-setting one week before
- Digital electronic time switch with daily programs
- Repeat programs with 17 on/off setting; and manual over-ride
- Lithium battery power reserve
- Auto time error correction ± 60 sec, weekly

TECHNICAL DATA



- Voltage rating: AC 220V 50/60Hz
 - Voltage limit: AC 180V~250V
 - Hysteresis: ≤ 1 sec/day (25°C)
 - ON/OFF operation: 17 ON & 17OFF
 - Power consumption: 2VA(max)
 - Display: LCD
 - Service life: Mechanical 10^7 , Electrically 10^5
 - Minimum interval: 1 minute
 - Weight: approx 65g
- Order voltage: 12V, 24V, 36V, 48V, 110V;
- Count down: 1 sec-99 min 56 sec
 - Pulse: 1 sec-59 min 59 sec
 - Load capacity: resistive load: 16A/250V AC, Lagging load: 10A/250Vac lamp load: 2000W
 - Switching contact: 1 changeover switch
 - Power reserve: 3 years (Lithium battery)
 - Ambient temperature: -10~+40°C
 - Ambient humidity: 35~85%RH

DISPLAY



1	P	TIMER
2	D+	DAY
3	H+	HOUR
4	M+	MIN
5	C	CLOCK
6	C	RESET
7	MANUAL	MANUAL C/R
8	C/R	Cancel / recovery

MEANING.



Operating Instruction:

- To start switch: press reset Key. At the first time, if you want to the present time, please press "C" On board, then press D+, H+, M+ to adjust the number to the present time.
- Enter into programming as belows:

Step	Key	Programming
1	Press P	Setting 1 ON time (display 1 on)
2	Press H+/M+	Setting hours and minutes
3	Press D+	To select same every day, or different time each day
4	Press P	Setting 1 off time (display 1 off)
5	Press H+/M+	Setting hours and minutes turn off time
6	Press D+	If you want the same every day, you need not press this key
7	Repeat step 2-6	Set 2-17 on/off time
8	Press C	End

If you do not require 17 settings, press "C" to the end.

NOTE:

- Time setting should according to the time sequence, couldn't be set crossly
- System with quit automatically if there's no operating within 10 seconds and no data is saved.
- Function 3, 4, 5 can not be used simultaneously.